

A Scorpius Trackers solar Plant



On a good **SUNNY** Day.....



Plant Details


Total Modules = 288
Module rating = 240w
Installed DC Power = 69.12 kW

On a good sunny day,
Inverter 1 power = 259 kWh
Inverter 2 power = 263 kWh


Total power generated = 522 kWh

100% CUF = $69.12 \times 24 = 1,659$ kWh

Plant CUF = $522 / 1659 = 31.4\%$

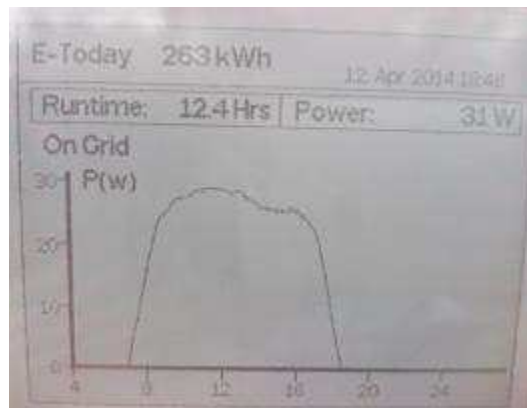

Inverter 1

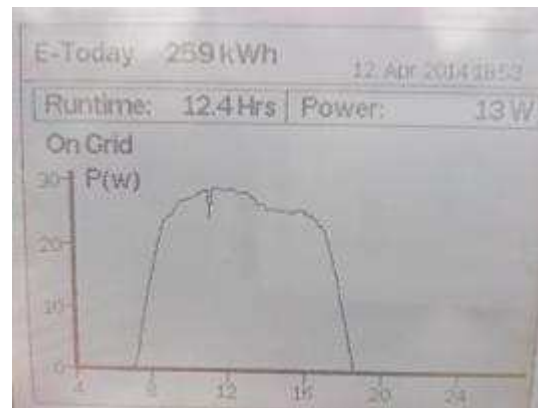

Inverter 2